

ET MODULE

- Positive Tolerance
- 48 Hour Response
- Local Technical Support
- Local Warehouses
- German manufacturing techniques
- Product Liability Insurance
- More than 100MW Reference
- High Quality Raw Materials
- Outstanding Performance
- Enhanced Design for Easy Installation and Long Term Reliability
- Custom Design with Wide Power Selection Down to 5W

The logo for ET Solar, featuring the letters 'ET' in a large, stylized blue font, with the word 'Solar' in a smaller, blue sans-serif font to its right.

ET Solar

ET MODULE

ET-P660240	240Wp
ET-P660235	235Wp
ET-P660230	230Wp
ET-P660225	225Wp
ET-P660220	220Wp
ET-P660215	215Wp
ET-P660210	210Wp
ET-P660205	205Wp
ET-P660200	200Wp



IEC 61215 Ed.2
IEC 61730



SPECIFICATIONS

Model type	ET-P660240	ET-P660235	ET-P660230	ET-P660225	ET-P660220	ET-P660215	ET-P660210	ET-P660205	ET-P660200
Peak power (Pmax)	240W	235W	230W	225W	220W	215W	210W	205W	200W
Cell type	PolyCrystalline Silicon, 156mm x 156mm								
Number of cells	60 cells in series								
Weight	19.3 kg (42.61 lbs)								
Dimensions	1640×992×50 mm (64.57×39.06×1.97 inch)								
Maximum power voltage (Vmp)	29.40V	29.40V	29.40V	29.00V	29.00V	29.00V	28.75V	28.75V	28.75V
Maximum power current (Imp)	8.16A	7.99A	7.82A	7.75A	7.58A	7.41A	7.30A	7.13A	6.95A
Open circuit voltage (Voc)	36.50V	36.50V	36.50V	36.30V	36.30V	36.00V	36.00V	36.00V	36.00V
Short circuit current (Isc)	8.50A	8.30A	8.30A	8.10A	8.10A	8.10A	7.99A	7.80A	7.71A
Maximum system voltage	DC 1000V								
Temp. Coeff. of Isc (TK Isc)	0.065 %/°C								
Temp. Coeff. of Voc (TK Voc)	-0.346 %/°C								
Temp. Coeff. of Pmax (TK Pmax)	-0.46 %/°C								
Normal Operating Cell Temperature	45.3±2°C								



Note: the specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m² solar irradiance, 1.5 Air Mass, and cell temperature of 25°C.
The NOCT is obtained under the Test Conditions : 800 W/m², 20°C ambient temperature, 1 m/s wind speed, AM 1.5 spectrum.

Please contact support@etsolar.com for technical support.

ET Module

ET-P660240 ET-P660235 ET-P660230 ET-P660225 ET-P660220
 ET-P660215 ET-P660210 ET-P660205 ET-P660200


PHYSICAL CHARACTERISTICS Unit:mm (inch)

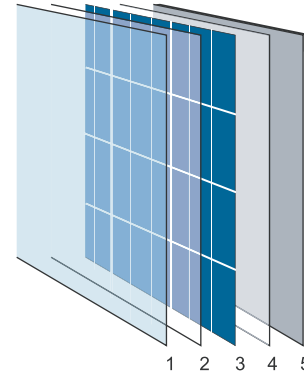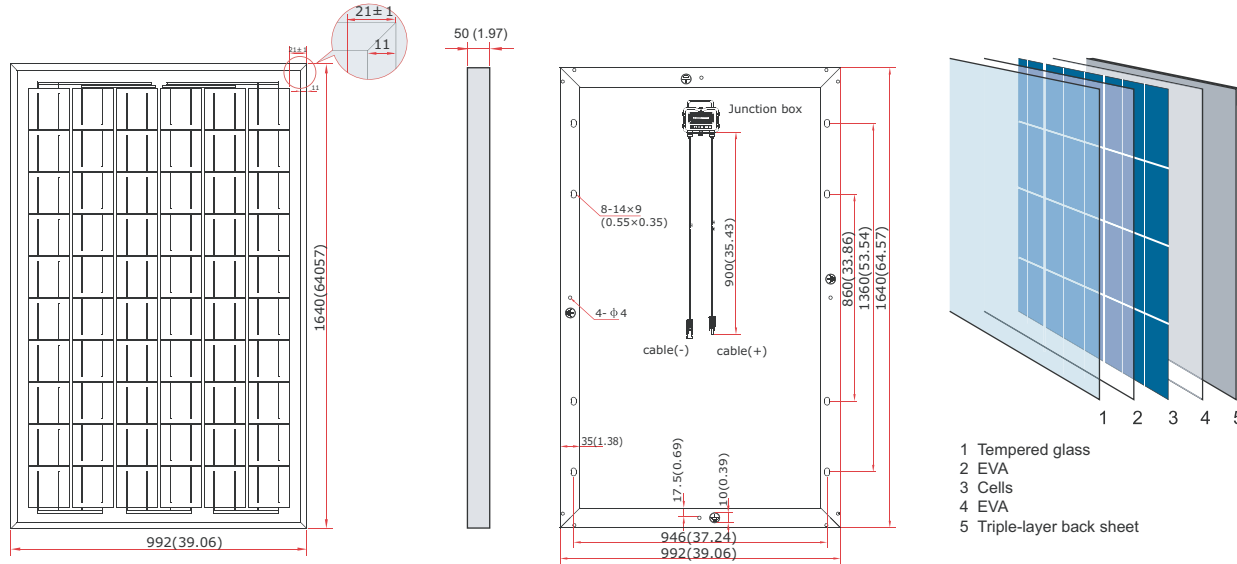


- 1 Tempered glass
- 2 EVA
- 3 Cells
- 4 EVA
- 5 Triple-layer back sheet

ELECTRICAL CHARACTERISTICS


Electrical performance
(cell temperature:25°C)

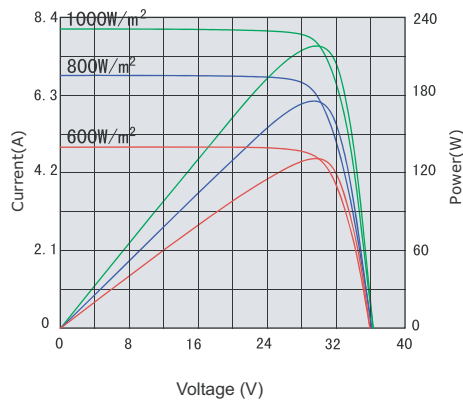

Temperature dependence of Isc, Voc and Pmax

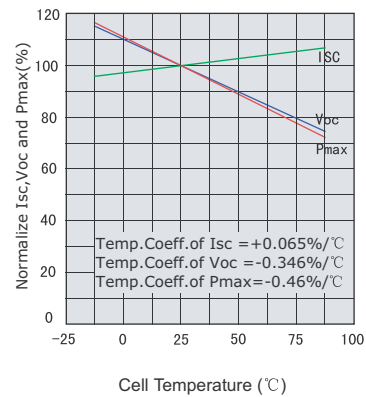

Irradiance dependence of Isc, Voc and Pmax (cell temperature:25°C)

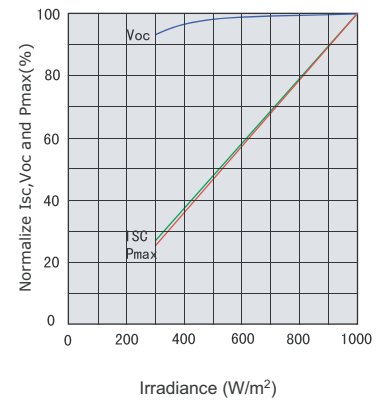



● **Headquarters (ET Solar Asia)**

Nanjing

Add: 24F, A2 World Trade Center Mansion,
67 Shanxi RD, Nanjing 210009, China

Taizhou

Add: 97 Jiangzhou South RD, Taizhou 225300, China

Tel: +86 25 8689 8098

Fax: +86 25 8689 8097

E-mail: sales@etsolar.com

● **Korea Office**

Add: B-605, Ssangyong IT tween tower, 442-5,

Sangdaewon-Dong, Seongnam City,

Kyunggi-Do, Korea

Tel: +82 31 732 4131

Fax: +82 31 732 4132

E-mail: sales@etsolar.com

● **ET Solar Europe**

Add: Im Munich City Tower,
Landsbergerstr. 110-114, D-80339,
Munich, Germany

Tel: +49 89 500 9405-0

Fax: +49 89 500 9405-99

E-mail: sales@etsolar.de

● **Italy Office**

Add: Via Boezio 6, 00193 Roma, Italy

Tel: +39 0632 803428

Fax: +39 0632 803400

E-mail: sales@etsolar.it

● **ET Solar USA**

Add: 4900 Hopyard Road, Suite 290,
Pleasanton, CA 94588, USA

Tel: +1-(925)-460-9898

Fax: +1-(925)-460-9929

E-mail: sales@etsolar.us

www.etsolar.com